

COMPANY BOLLARD UP&DOWN BULKHEAD FLOODLIGHT IN-GROUND BRICKLIGHT GARDEN URBAN CLASSIC URBAN MODERN HIGH-BAY POST LAMPS REFERENCES

LETI 100 ROUND

RECESSED LAMP



Recessed wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV approved, long-life and efficient **GX53 LED lamp 3W-350lm included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada LED per incasso a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con inclusa lampadina a LED GX53 3W-350lm approvata TÜV, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 100 ROUND
2C1.000



LETI 100 ROUND-GR
2C2.000



LETI 100 ROUND-EL
2C3.000



LETI 100 ROUND-ST
2C4.000



2C1.000.G1L



LETI 100 ROUND - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided with **GX53 3W led lamp** and with silicone rubber gasket to ensure high protection against external agents.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led 3W GX53 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 ROUND



Dimensions and weight

Diameter: Ø 134 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:


Black White Grey

Diffuser PMMA:

Opal

GX53 LED

*ADD SUFFIX

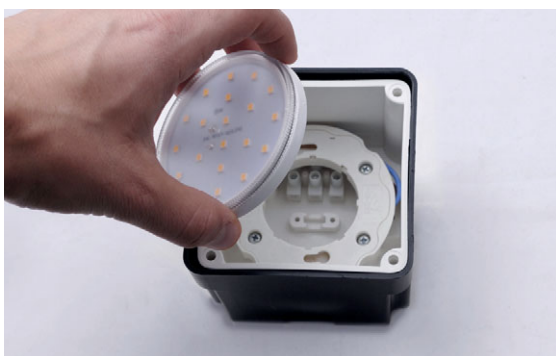

	3 W	350 Lm	4000 K	.G1L
			3000 K	.G1R

Recessed lamp supplied as standard with TÜV approved, long-life and efficient **GX53 LED lamp 3W-350lm included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.



3W 350 Lm = 40W incandescent
SAVE 93%

LED LAMPS



More technical details about TÜV approved Fumagalli LED Lamps on page 512.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 100 ROUND

RECESSED LAMP



2C3.000.G1L



2C1.000.G1L




2C4.000.G1L



2C2.000.G1L





LETI 100 ROUND

2C1.000.G1L	3W	2C1.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-GR

2C2.000.G1L	3W	2C2.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-EL

2C3.000.G1L	3W	2C3.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-ST

2C4.000.G1L	3W	2C4.000.G1R
4000K	GX53 LED LAMP INCLUDED	3000K

Pcs 48
Kg 20,3
mc 0,12